

PATENT  
Docket No. 29273/502

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ASSISTANT COMMISSIONER  
FOR PATENTS  
Washington, DC 20231

SIR:

Transmitted herewith for filing under 37 C.F.R. § 1.53 is the patent application of

Inventors : Hajime KAWANO et al.  
Serial No. : (Unassigned)  
Filed : (Herewith)  
For : ELECTRON BEAM LITHOGRAPHY SYSTEM

Enclosed are:

1. Declaration/Power of Attorney;
2. 35 sheets of specification, 4 sheets of claims, 1 sheet of abstract;
3. 14 sheets of drawings;
4. Charge Deposit Account No. 11-0600 in the amount of \$760.00 representing the fee under 37 C.F.R. §§ 1.16(a), (b) and (c);
5. Certified Copy of Japanese Patent Application No. 10-149045 filed in Japan on 29 May, 1998, for which priority is claimed under 35 USC §119;
6. Information Disclosure Statement, form PTO-1449 with 12 references;
7. Assignment from the Inventors to Hitachi, Ltd., Tokyo, Japan, with recordation form cover sheet charging the fee to Deposit Account No. 11-0600.

The filing fee has been calculated as shown below:

For	No. Filed	No. Extra	Rate	Fee
Basic Fee .....				\$760.00
Total Claims .....	10 - 20 =	0	\$ 18.00	\$ -0-
Independent Claims ..	2 - 3 =	0	\$ 78.00	\$ -0-
TOTAL FEE .....				<u>\$760.00</u>

jc511 U.S. PTO  
09/315988  
05/21/99


jc595 U.S. PTO  
05/21/99

09315988 - 052199

The Commissioner is hereby authorized to charge payment of the total fee of \$760.00 and any additional fees associated with this communication or credit any overpayment to Deposit Account No. 11-0600.

The Commissioner is further authorized to charge payment of any patent application processing fees under 37 C.F.R. §1.17 or any filing fees under 37 C.F.R. §1.16 for presentation of extra claims during the pendency of this application or credit any overpayment to Deposit Account No. 11-0600. A copy of this sheet is enclosed for that purpose.

Respectfully submitted,



John C. Altmiller  
(Reg. No. 25,951)

Dated: 21 May 1999

KENYON & KENYON  
1500 K Street, N.W., Suite 700  
Washington, DC 20005

Tel: (202) 220-4200

Fax: (202) 220-4201

191566\29273/502

091588-0515  
061250-8857E60

TITLE OF THE INVENTION

ELECTRON BEAM LITHOGRAPHY SYSTEM

BACKGROUND OF THE INVENTION

The present invention relates to an electron beam lithography system for rendering fine patterns using an electron beam.

Generally, electron beam lithography systems are known for such characteristics as (1) an ability to form fine patterns, (2) possession of a pattern generating function, and (3) a capability of correcting distortion. With these features in their arsenal, the systems have been used extensively in developing LSIs and fabricating masks for optical exposure. While excelling in fine working, the electron beam lithography systems are nevertheless confronted with a physically unavoidable bottleneck known as the proximity effect experienced when VLSI patterns are rendered on the submicron order.

Fig. 16 is a schematic view illustrating the principle of the proximity effect. In Fig. 16, an electron beam 72 is incident on a substrate 70 over which an electron beam resist 71 has been applied. The proximity effect is caused primarily by two kinds of electron scattering: forward scattering and backward scattering. Electrons emitted by an electron gun and incident on the electron beam resist 71 first collide with component atoms

0915988-052169  
651250-33651660

of the resist 71 and are scattered thereby continuously while discharging their energy. The process is called forward scattering. Most of the incident electrons penetrate the substrate, get scattered thereby and return partially to the resist 71. This process is called backward scattering.

These processes result in the incident energy being accumulated not only in the irradiated (i.e., exposed) region but also elsewhere. Hence an insufficient dose (exposure) likely to occur in rendering fine patterns. Conversely, excess energy tends to accumulate in space between figures of a large pattern. Consider a case where an electron beam is used to render a pattern made of a plurality of figures. In that case, if the figures are numerous and are clustered in close proximity, they tend to be rendered thick; if the figures are sparsely distributed and isolated from one another, they are likely to be rendered thin. The phenomenon is called the proximity effect.

One technique for correcting the proximity effect is disclosed illustratively in Japanese Published Unexamined Patent Application No. Hei 03-225816. The disclosed technique involves calculating a rendering area of each of regions divided by rendering data and thereby creating a dose (exposure) map. The exposure map is referenced for each shot. The exposure is increased for patterns of low

00345988 052499  
66T250 8865T60

rendering densities and lowered for patterns of high rendering densities, whereby each pattern is rendered at an optimum exposure level in keeping with the rendering density in effect.

Other techniques have been proposed to correct the proximity effect. For example, U.S. Patent No. 4,463,265 discloses a so-called ghost method whereby a defocused electron beam is used to render a monochromatically reversed pattern of a target figure for correcting the proximity effect. Japanese Published Examined Patent Application No. Sho 63-14866 describes a method for obtaining levels of exposure at opposing ends of a dimensionally corrected pattern so that the pattern ends will have intensity ratios lower than a predetermined value. Japanese Published Examined Patent Application No. Sho 62-46059 discloses a method for acquiring a ratio of an irradiation density at which a resist pattern of the same size as that of a target rendering pattern is obtained, to an irradiation density at which a predetermined residual film is provided, so that the target pattern is rendered at a suitable irradiation density and in a suitable size for the residual film to be formed.

The technique disclosed in Japanese Published Unexamined Patent Application No. Hei 03-225816 is characterized in that it initially carries out mock rendering to create an exposure map and then performs

0934598.052199  
657250 88657660

actual rendering by referring to the exposure map thus created.

Fig. 17 is a schematic block diagram illustrating the concept of the above technique. Rendering data that are input to an input unit 81 comprise exposure data as well as position and shape data about each of shots computed by a figure disassembling and reassembling correction unit located upstream of the input unit 81. The exposure map is created by first carrying out mock rendering. When rendering data (shot shapes and positions) are received from the preceding stage, an area value computing unit 82 calculates the area of each shot.

As shown in Fig. 18, the rendering data are divided into square meshes having a side length of  $\alpha$  each. To a mesh containing a center 91 of each shot 90, the area of the shot in question is added cumulatively. The result is stored temporarily in a memory portion called a partial memory 83. The process is repeated. The area value held in the partial memory 83 is transferred to an exposure map memory 84. The data retained in the exposure map memory 84 are subjected to such processes as data smoothing by a smoothing filter 85. The processed data are placed back into the exposure map memory 84.

Actual rendering is then performed as follows: the same rendering data are again received from the preceding stage. Given the shot position and shape data, an address

001593-00000000

computing unit 86 calculates an address in the exposure map. The area value for the calculated address in the exposure map memory 84 is converted simultaneously to a level of exposure by an exposure converting unit 87. An adder 88 adds or subtracts the exposure level to or from the exposure of each shot. The output of the adder 88 is forward downstream through an output unit 89. In this manner, shots included in large-area meshes are assigned low levels of exposure while those in small-area meshes are given high levels of exposure, whereby desired correction is supposed to be accomplished.

Where the exposure map is created by adding the area of each shot to a mesh containing the center of the shot in question, as described above, problems occur if the shot center is located close to a mesh boundary. Fig. 19 is a schematic view outlining such problems experienced illustratively when three meshes contain a number of shots.

In Fig. 19, shots 1 and 3 are significantly close in size to their corresponding meshes while a shot 2 is appreciably smaller than its corresponding mesh. The shot 1 straddles the meshes 1 and 2. The center C1 of the shot 1 is included in the mesh 1 close to the boundary between the meshes 1 and 2. The shot 2 together with its center C2 is included in the mesh 2. The shot 3 straddles the meshes 2 and 3. The center C3 of the shot 3 is included in the mesh 3 close to the boundary between the meshes 2 and 3.

09315988-052109  
667250-8857E60

In the above makeup, the proximity effect works in such a manner that space between shots tends to be narrowed. Thus to correct the adverse effect requires reducing the exposure of the shot 2. With the above conventional method, however, the area value is accumulated at the center of each shot so that, as shown in the lower part of Fig. 19, all area value of the shot 1 is added to the mesh 1 and the entire area value of the shot 3 is added to the mesh 3.

Meanwhile, the mesh 2 that needs to have the largest possible area value is only supplemented by the area value of the shot 2. As a result, the meshes 1 and 3 are given large area values while the mesh 2 is assigned a small area value. When this kind of exposure map is used for exposure correction, the shot 2 in the mesh 2 is corrected to have a raised level of exposure and the shots 1 and 3 are corrected to have lowered levels of exposure. This type of exposure correction is contrary to what is expected of the corrective process implemented. Exposure correction remains unavailable.

Figs. 20 and 21 illustrate specific simulations for purpose of illustration. Fig. 20 shows rendering data representing a  $60\ \mu\text{m} \times 60\ \mu\text{m}$  square. Fig. 21 depicts a three-dimensional exposure map created by dividing the rendering data into  $3.0\ \mu\text{m} \times 3.0\ \mu\text{m}$  shots. In this exposure map, each mesh measures  $5.12\ \mu\text{m}$  by  $5.12\ \mu\text{m}$  within a range of 20 by 20 meshes. The obtained values are each

001598-0510  
667250-8857E60



given as a percentage of the shot area in each mesh, i.e., as area ratios.

Seen in Fig. 20, the exposure map may be expected to have a substantially uniform area ratio distribution in the figure-containing region. In fact, simulation results in a distinctly undulating exposure map as shown in Fig. 21. If rendering were performed by use of this map, exposure errors of up to  $\pm 40\%$  would occur. Such extensive exposure errors would completely nullify any expectations of enhanced accuracy, and the attempt to correct the proximity effect would come to nothing.

At present, the accuracy of proximity error correction is typically raised by reducing the shot size. Illustratively, dividing rendering data into  $0.64 \mu\text{m} \times 0.64 \mu\text{m}$  shots allows an exposure map to be created to  $\pm 5\%$  precision. When the undulating map thus created is subjected to smoothing (e.g., by use of an averaging filter in specific mesh regions), the error may be further reduced to  $\pm 1.5\%$  or less.

The above technique has its share of disadvantages. Reducing the shot size increases the number of shots in the same figure rendered. Illustratively, if the shot size is reduced from  $3.0 \mu\text{m} \times 3.0 \mu\text{m}$  to  $0.64 \mu\text{m} \times 0.64 \mu\text{m}$ , the number of shots is increased by a factor of about 22 [=  $(3.0/0.64)^2$ ]. Because the time required to create an exposure map is substantially proportional to the number of

001598810549  
66T250" 3865T E60

## SUMMARY OF THE INVENTION

The foregoing and other objects of this invention are achieved illustratively by an electron beam lithography system which divides shots by mesh boundaries and splits an area in a given mesh for cumulative addition of the split area value to an adjacent mesh. The center of each shot is not considered when an exposure map is created.

Fig. 1 is a conceptual view showing the principle of this invention schematically. In Fig. 1, a shot 1 straddles meshes 1 and 2, a shot 2 is inside the mesh 2, and a shot 3 straddles the mesh 2 and a mesh 3. In such a case, the area value of the shot 1 is divided into the meshes 1 and 2 and the area value of the shot 3 into the meshes 2 and 3, whereby the area value of each mesh is

supplemented cumulatively. As a result, as shown in the lower part of Fig. 1, the mesh 2 comes to have a larger area value than that of the mesh 1 or 3. Using this kind of exposure map thus makes it possible to reduce the exposure of the shot 2 so as to correct the proximity effect.

In carrying out the invention and according to one aspect thereof, there is provided an electron beam lithography system comprising: exposure map creating means which, based on positional relations between meshes dividing a region to be rendered by an electron beam on the one hand and shots to be rendered by the electron beam on the other hand, creates an exposure map by calculating an area density from a shot area included in each of the meshes; and proximity effect correcting means for correcting a level of exposure for each of the shots by referencing the exposure map so that each shot is exposed at the corrected level; wherein the exposure map creating means includes judging means for judging whether or not each shot straddles a plurality of meshes.

In a preferred structure according to the invention, based on positional relations between coordinates of two diagonally positioned end points of each shot on the one hand and mesh boundaries on the other hand, the judging means may judge whether the shot in question straddles the plurality of meshes. The exposure map creating means may

00345988.052499  
66T250.8865T660

preferably divide each shot straddling the plurality of meshes by boundaries of the meshes so that either area values or area densities of divided shots included in each mesh are added to the mesh in question.

In another preferred structure according to the invention, the electron beam lithography system may further comprise  $N \times M$  memories for accommodating either area values or area densities of shots,  $N$  representing a maximum number of divided shots in a direction of one boundary of a given mesh,  $M$  denoting a maximum number of divided shots in a direction of another boundary of the mesh in question. This structure is preferred for its ability to boost processing speeds. If the area value of a given shot is divided into  $N \times M$  portions and if the divided values were stored into a single memory, that memory would have to be accessed  $N \times M$  times because area values vary in different meshes having obviously different addresses.

If  $N \times M$  partial memories are provided with the same address, write operations are performed in a relatively easy manner, with the divided area values stored per shot and written simultaneously to adjacent addresses of each mesh. Upon retrieval,  $N \times M$  data are required to be read simultaneously. The requirement is met by an adding function provided downstream of the partial memories. Preferably, when either an area value or an area density of each shot is divided for a plurality of meshes in order to

0934598-052109  
557250-8857860

store the divided values or densities into the memories, either the divided shot area values or the divided shot area densities included in each mesh may be set simultaneously to different addresses in different memories so that when data are to be retrieved from the memories, the data are read from the same address of all memories. The electron beam lithography system may further comprise a function for adding up a plurality of data retrieved from the same address in a plurality of the memories.

It is also possible to divide the region to be rendered by the electron beam into mesh groups each having  $N \times M$  meshes, each mesh group being assigned a single address in each of  $N \times M$  memories. Preferably, the electron beam lithography system may further comprise the  $N \times M$  memories assigned the same addresses as those of the  $N \times M$  meshes constituting each of the mesh groups dividing the region to be rendered by the electron beam. The system may also comprise, preferably, selecting means for selecting a desired memory as well as a desired address therein from among the  $N \times M$  memories in accordance with the address of a given mesh.

In a further preferred structure according to the invention, the selecting means may select the memory into which to store either the area value or the area density of the mesh in question at an address  $(m, n)$  on the basis of a remainder from a formula of  $n/N$  and a remainder from a

091598-05109  
657250-8851860

[illegible][illegible][illegible][illegible][illegible][illegible]

	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99																																																																																																																																																												
0	00000000	00000001	00000010	00000011	00000100	00000101	00000110	00000111	00001000	00001001	00001010	00001011	00001100	00001101	00001110	00001111	00010000	00010001	00010010	00010011	00010100	00010101	00010110	00010111	00011000	00011001	00011010	00011011	00011100	00011101	00011110	00011111	00100000	00100001	00100010	00100011	00100100	00100101	00100110	00100111	00101000	00101001	00101010	00101011	00101100	00101101	00101110	00101111	00110000	00110001	00110010	00110011	00110100	00110101	00110110	00110111	00111000	00111001	00111010	00111011	00111100	00111101	00111110	00111111	01000000	01000001	01000010	01000011	01000100	01000101	01000110	01000111	01001000	01001001	01001010	01001011	01001100	01001101	01001110	01001111	01010000	01010001	01010010	01010011	01010100	01010101	01010110	01010111	01011000	01011001	01011010	01011011	01011100	01011101	01011110	01011111	01100000	01100001	01100010	01100011	01100100	01100101	01100110	01100111	01101000	01101001	01101010	01101011	01101100	01101101	01101110	01101111	01110000	01110001	01110010	01110011	01110100	01110101	01110110	01110111	01111000	01111001	01111010	01111011	01111100	01111101	01111110	01111111	10000000	10000001	10000010	10000011	10000100	10000101	10000110	10000111	10001000	10001001	10001010	10001011	10001100	10001101	10001110	10001111	10010000	10010001	10010010	10010011	10010100	10010101	10010110	10010111	10011000	10011001	10011010	10011011	10011100	10011101	10011110	10011111	10100000	10100001	10100010	10100011	10100100	10100101	10100110	10100111	10101000	10101001	10101010	10101011	10101100	10101101	10101110	10101111	10110000	10110001	10110010	10110011	10110100	10110101	10110110	10110111	10111000	10111001	10111010	10111011	10111100	10111101	10111110	10111111	11000000	11000001	11000010	11000011	11000100	11000101	11000110	11000111	11001000	11001001	11001010	11001011	11001100	11001101	11001110	11001111	11010000	11010001	11010010	11010011	11010100	11010101	11010110	11010111	11011000	11011001	11011010	11011011	11011100	11011101	11011110	11011111	11100000	11100001	11100010	11100011	11100100	11100101	11100110	11100111	11101000	11101001	11101010	11101011	11101100	11101101	11101110	11101111	11110000	11110001	11110010	11110011	11110100	11110101	11110110	11110111	11111000	11111001	11111010	11111011	11111100	11111101	11111110	11111111

[illegible][illegible]

relations between a shot and meshes;

Fig. 6 is a graphic representation explaining exposure map data created by the inventive system;

Fig. 7 is a schematic view showing how shots are divided by mesh boundaries;

Fig. 8 is a block diagram of another proximity effect correcting unit of the invention;

Fig. 9 is a schematic view of a map structure with each address representative of four meshes;

Fig. 10 is a schematic view explaining how addresses are allocated in the map structure with each address representative of four meshes;

Fig. 11 is an explanatory view of an address allocation condition 1 for the map structure with each address representative of four meshes;

Fig. 12 is an explanatory view of an address allocation condition 2 for the map structure with each address representative of four meshes;

Fig. 13 is an explanatory view of an address allocation condition 3 for the map structure with each address representative of four meshes;

Fig. 14 is an explanatory view of an address allocation condition 4 for the map structure with each address representative of four meshes;

Fig. 15 is a schematic view explaining how area values divided by mesh boundaries are allocated to partial

001598.0549  
66T250" 8865TF60

Fig. 16 is a schematic view depicting how electrons are typically scattered by an electron beam;

Fig. 18 is an explanatory view illustrating the principle of a conventional exposure map creating method;

Fig. 20 is a graphic representation showing a shape taken by rendering data used for simulation; and

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[First Embodiment]

Fig. 2 is a schematic view of an electron beam lithography system embodying the invention. A cross-



sectional view in the right-hand portion of Fig. 2 comprises an electron beam enclosure 10, a specimen table 11 and a transporting unit 12. An electron gun 13 at the top of the electron beam enclosure 10 emits an electron beam 14 that is suitably shaped by lenses 16 inside. The electron beam 14 thus shaped is polarized by a polarizer 17 composed of an electromagnetic and an electrostatic polarizer. The polarized electron beam is irradiated to a target spot on a semiconductor wafer 18 placed on the specimen table 11. Several cross-sectional shapes of the irradiated electron beam 14 may be transcribed onto the wafer 18 by selecting a mask 15 appropriately.

The left-hand portion of Fig. 2 shows components of a system control computing section controlling the entire system and providing an interface with the outside. A group of functional blocks enclosed in a frame 21 constitutes a group of digital processing units for control purposes. These processing units convert rendering data from a computer 22 into polarization data about the electron beam in a continuous manner (i.e., on a pipeline basis) at a high speed. The individual processing units carry out the following processes:

(1) Figure data unit

A figure data unit stores compressed pattern data transferred from the computer 22.

(2) Figure reassembling unit

A figure reassembling unit reassembles the compressed pattern data into figure data.

(3) Figure disassembling unit

A figure disassembling unit replaces each reassembled figure with a shape (i.e., shot) that may be rendered by electron beam, thereby creating position, shape and exposure data about each shot.

(4) Alignment correcting unit

An alignment correcting unit monitors the wafer 18 for misalignment and distortion using a sensor 19, and makes corrections to compensate for any misalignment or distortion detected.

(5) Proximity effect correcting unit

A proximity effect correcting unit corrects the proximity effect by first obtaining a unit pattern area map (i.e., exposure map) of a pattern to be rendered and by correcting the level of exposure for each shot with reference to the values in the exposure map.

(6) Absolute follow-up calibrating unit

An absolute follow-up calibrating unit permits continuous rendering. Based on position data from a specimen table position measuring unit 20, this calibrating unit calculates the position of the polarized electron beam so that the electron beam 14 is kept irradiated precisely onto the target spot on the wafer 18, and corrects distorted polarization in the electron beam enclosure.

00345988.052409  
00T250.0065T360

(7) Procedure controlling unit

A procedure controlling unit provides monitoring and controlling functions such as to keep the above units performing their processing smoothly.

Data coming from the above control-related units are converted from digital to analog format by a D/A converter 23. The converted data are sent to a beam controlling unit 24 that controls electromagnetic lenses as well as the electromagnetic and electrostatic polarizers. A high voltage supply 25 provides the electron gun 13 with power to generate acceleration voltages. A mask controlling unit 26 selects the shape of a mask 15. A specimen table controlling unit 27 controls movements of the specimen table 11 in the enclosure 10. The transporting unit 12, under control of a transport controlling unit 28, loads the wafer 18 into the enclosure. The units exchanging their signals through an interface may be controlled by computer.

Fig. 3 is a block diagram of a typical proximity effect correcting unit of the invention. This proximity effect correcting unit differs from its counterpart in the way in which exposure maps are created. An exposure map for mock rendering is created by first having rendering data sent from the preceding stage. An input unit 31 divides the rendering data into meshes of a predetermined size each. A judging unit 32 computes positional relations between each shot and meshes based on the position and

00315988 052199  
66T250 8865T E60

shape of the shot in question, and makes a judgment accordingly.

Illustratively, if each shot is smaller than any one of the meshes involved, the judging unit 32 reaches one of the following four judgments that may be called conditions:

Condition 1: The shot in question is included in a mesh.

Condition 2: The shot exceeds a mesh boundary in the X direction only.

Condition 3: The shot exceeds a mesh boundary in the Y direction only.

Condition 4: The shot exceeds mesh boundaries in both the X and the Y directions.

In each of the above conditions, the judging unit 32 computes shot areas divided by mesh boundaries and included in each mesh, and writes the computed values to memory locations. Obviously, the data coming from the preceding stage are unpredictable and may represent any one of the four conditions above. Whereas the data falling under the condition 1 alone are accommodated with no problem by a single memory, the data under the condition 4 cannot be processed on a pipeline basis using one memory because one shot has been divided into four meshes. In the latter case, there is no avoiding the slowing-down of the processing. This snag is circumvented by the inventive proximity effect correcting unit utilizing four partial memories 34a through 34d (memories 0 through 3). Each of the four partial

667250" 8865T660

memories 34a through 34d has its own address  $(m, n)$ .

As will be described later in more detail, area values  $S_0$ ,  $S_1$ ,  $S_2$  and  $S_3$  calculated by area value computing units 33a through 33d are stored simultaneously into the four partial memories 34a through 34d, whereby the processing is carried out rapidly on a pipeline basis. Addresses at which to store the area values  $S_0$  through  $S_3$  are given as  $(m, n+1)$ ,  $(m+1, n)$  and  $(m+1, n+1)$  adjacent to address  $(m, n)$  of the mesh containing illustratively the bottom left end point of the shot in question. For conditions such as the condition 1 under which no area value is computed, zero is written to addresses  $(m, n+1)$ ,  $(m+1, n)$  and  $(m+1, n+1)$  of the partial memories 1, 2 and 3 respectively ( $S_1 = 0$ ,  $S_2 = 0$ ,  $S_3 = 0$ ).

It is possible to calculate levels of exposure by referring to the area values stored in the partial memories 34a through 34d. Generally, the flow of data from the preceding stage is rapid enough to necessitate the use of S-RAMs for the partial memories 34a through 34d. At present, it is difficult for such an S-RAM makeup to accommodate the whole rendering data. Preferably, the area values placed temporarily in the memories 34a through 34d should then be transferred to an exposure map memory (e.g., D-RAM) 36 capable of accommodating large quantities of data.

Different data are found in the four partial memories 34a through 34d at a single address thereof. Thus

09345988 052499  
66T250 8865T860

when data are to be transferred from the partial memories 34a through 34d to the exposure map memory 36, the data are retrieved from the same address of the four partial memories and are added up by an adding circuit 35 in the subsequent stage totaling the data for each address. The totaled data are transferred to the exposure map memory 36. In this manner, one set of data is associated with one address.

The data stored in the exposure map memory 36 are subjected to such processes as smoothing by a smoothing filter 37 in order to simulate primary and secondary scattering of electrons. The data thus processed are again placed into the exposure map memory 36 whereby a desired exposure map is created. When actual rendering is performed, the same data are again transmitted from the preceding stage.

Given position and shape data about each shot, an address computing unit 38 calculates an address in the exposure map 36. The area value of the address is converted simultaneously to a level of exposure by an exposure level converting unit 39, and an adder 40 adds or subtracts the converted value to or from the level of exposure of each shot for correction. At this point, the address in the exposure map 36 is calculated by the address computing unit 38 with reference to the center of the shot in question.

00315088 052109  
66T250 8865T60

In the present example, the four partial memories 34a through 34d are used because the size of shots is assumed not to exceed that of meshes. The number of patterns may vary depending on the size of the largest shot. For example, if the maximum shot size is 1.5 times larger than the mesh size, nine partial memories are provided because conditions need to be considered over a  $3 \times 3$  mesh region. In this manner, furnishing a suitable number of partial memories in keeping with the maximum shot size makes it possible for the proximity effect correcting unit of Fig. 3 to correct the proximity effect where the relationship between the maximum shot size and the mesh size varies.

With reference to Figs. 4 and 5 and using simulations, an illustrative description is made below of judgments formed by the judging unit 32 and of area value calculations made by the area value computing units 33a through 33d (shown included in the block diagram of Fig. 3). Fig. 4 is a block diagram of a typical circuit that divides the area of the shot in question and adds up the divided area values by judging positional relations between the position and shape of rendering data (shot data in this case) on the one hand and mesh boundaries on the other hand. Fig. 5 is a schematic view depicting positional relations between a shot 50 and meshes. Judgments are formed in the setup of Fig. 5 by use of a bottom left end point 51 and a

00T250" 0005T.E.60

top right end point 52 of the shot 50.

The parameters shown in Figs. 4 and 5 include position data  $(x, y)$  about the bottom left end point 51 of the shot 50 (in Fig. 5), shape data "w" and "h" on the shot 50, and a mesh size of  $\alpha$ . A rectangular shot is used for the purpose of simplifying position and shape data. Reference characters "x" and "y" stand for an X and a Y coordinate, respectively, of the bottom left end point 51 belonging to the shot 50. Reference characters "w" and "h" denote a width and a height of the rectangular shot 50 respectively. Each mesh is assumed to be a square on condition that  $\alpha \geq w$  and  $\alpha \geq h$ .

How the circuit of Fig. 4 works will now be described using the above parameters. Address  $(m, n)$  of the mesh containing the shot 50 is defined by expression (1) below with respect to the position where the bottom left end point 51 exists. The definition is adopted with a view to simplifying the conditions with reference to an end point. In the expression below,  $[I]$  means a maximum integer not exceeding  $I$ .

$$m = [x/\alpha], n = [y/\alpha] \quad \dots (1)$$

It is in one of four conditions (1 through 4 described below) that the bottom left end point 51 of a given shot 50 is included in the mesh having address  $(m, n)$  in Fig. 5. As shown in Fig. 4, the judging unit 32 makes a judgment on each of the conditions using seven parameters

09315988 052199  
65T250 8865T260



$\alpha$ ,  $m$ ,  $x$ ,  $w$ ,  $n$ ,  $y$ ,  $h$  coming from the input unit 31, and computes as shown below area values  $S_0$  through  $S_3$  for the meshes having addresses  $(m, n)$ ,  $(m, n+1)$ ,  $(m+1, n)$  and  $(m+1, n+1)$ . That is, the values  $S_0$  through  $S_3$  denote the shot areas included in the meshes  $(m, n)$ ,  $(m, n+1)$ ,  $(m+1, n)$  and  $(m+1, n+1)$  respectively. In any of the four conditions, the area values  $S_0$  through  $S_3$  are written to addresses of partial memories as indicated below. If any address of a partial memory to which to write a newly computed area value has area value data already, the new value is added to the existing data.

$S_0 \rightarrow$  written to address  $(m, n)$  of partial memory 0

$S_1 \rightarrow$  written to address  $(m, n+1)$  of partial memory 1

$S_2 \rightarrow$  written to address  $(m+1, n)$  of partial memory 2

$S_3 \rightarrow$  written to address  $(m+1, n+1)$  of partial memory 3

Condition 1: This is a case where the top right end point 52 of the shot 50 is included in the mesh  $(m, n)$ , i.e., where  $(n + 1) \cdot \alpha - x \geq w$  and  $(m + 1) \cdot \alpha - y \geq h$ .

$$S_0 = w \cdot h$$

$$S_1 = 0$$

$$S_2 = 0$$

$$S_3 = 0$$

Condition 2: This is a case where the top right end point 52 of the shot 50 is included in the mesh  $(m, n+1)$ , i.e.,

where  $(n + 1) \cdot \alpha - x < w$  and  $(m + 1) \cdot \alpha - y \geq h$ .

$$S0 = [(n + 1) \cdot \alpha - x] \cdot h$$

$$S1 = [x + w - (n + 1) \cdot \alpha] \cdot h$$

$$S2 = 0$$

$$S3 = 0$$

Condition 3: This is a case where the top right end point 52 of the shot 50 is included in the mesh  $(m+1, n)$ , i.e.,

where  $(n + 1) \cdot \alpha - x \geq w$  and  $(m + 1) \cdot \alpha - y < h$ .

$$S0 = w \cdot [(m + 1) \cdot \alpha - y]$$

$$S1 = 0$$

$$S2 = w \cdot [y + h - (m + 1) \cdot \alpha]$$

$$S3 = 0$$

Condition 4: This is a case where the top right end point 52 of the shot 50 is included in the mesh  $(m+1, n+1)$ , i.e.,

where  $(n + 1) \cdot \alpha - x < w$  and  $(m + 1) \cdot \alpha - y < h$ .

$$S0 = [(n + 1) \cdot \alpha - x] \cdot [(m + 1) \cdot \alpha - y]$$

$$S1 = [x + w - (n + 1) \cdot \alpha] \cdot [(m + 1) \cdot \alpha - y]$$

$$S2 = [(n + 1) \cdot \alpha - x] \cdot [y + h - (m + 1) \cdot \alpha]$$

$$S3 = [x + w - (n + 1) \cdot \alpha] \cdot [y + h - (m + 1) \cdot \alpha]$$

Fig. 6 is a graphic representation of an exposure map shown three-dimensionally and created by disassembling rendering data on a  $60 \mu\text{m} \times 60 \mu\text{m}$  square in Fig. 20 using a  $3.0 \mu\text{m} \times 3.0 \mu\text{m}$  shot. For this exposure map,

001598 0546 66T250 8865T60

calculations are made over a range of  $20 \times 20$  meshes each measuring  $5.12 \mu\text{m} \times 5.12 \mu\text{m}$ . The acquired values are each expressed as a percentage of the shot area included in each mesh, i.e., as an area ratio.

A comparison of Fig. 6 with Fig. 21 indicates a uniform area ratio distribution obtained inventively over the region where the figure exists. The results remain the same when the shot size is set for  $0.64 \mu\text{m} \times 0.64 \mu\text{m}$  or when the mesh size is  $5.12 \mu\text{m} \times 5.12 \mu\text{m}$ . Exposure maps may thus be created independently of the shot size as long as the mesh size is not exceeded by the shot. In other words, highly precise exposure maps are created without having to reduce the shot size as has been the case conventionally. According to the invention, the time required for the processing is shortened while precision is maintained.

When the exposure process is performed with the proximity effect corrected by use of an inventive exposure map, patterns are exposed in high degrees of precision. Although it has been shown above that the judgments and area value computations are made by hardware on a pipeline basis, this is not limitative of the invention. Similar judgments and calculations may also be accomplished on a software basis.

The method outlined above will now be described in more detail with reference to Fig. 7. The emphasis will be

09345988.052199  
66T250 8865T260

on the reasons why four partial memories are employed and why an adding circuit is incorporated to integrate four items of data held in the four partial memories (i.e., partial memories 34a through 34d explained with reference to Figs. 3 and 4).

Suppose that an exposure map has nine meshes (whose addresses are indicated by encircled numerals) as shown in Fig. 7, and that four shot data A, A', A'' and A''' have been input as indicated. A figure represented by the shot data A straddles the meshes having addresses 5, 6, 8 and 9. Likewise, a figure denoted by the shot data A' straddles the meshes with addresses 1, 2, 4 and 5. A figure defined by the shot data A'' straddles the meshes with addresses 4 and 5, and a figure of the shot data A''' straddles the meshes having addresses 1 and 4. Data to be written to the partial memories in this makeup are shown in Table 1.

Table 1

		MEMORY 0	MEMORY 1	MEMORY 2	MEMORY 3
ADDRESS	1	S0'+S0'''			
	2		S1'		
	3				
	4	S0''		S2'+S2'''	
	5	S0	S1''		S3'
	6		S1		
	7				
	8			S2	
	9				S3

Illustratively, the shot A has its area value S0 written to address 5 of memory 0, its area value S1 written

to address 6 of memory 1, its area value S2 written to address 8 of memory 2, and its area value S3 written to address 9 of memory 3. It should be noted that the shot area values are stored at different addresses in different memories. In the case of the shots A' and A''', their bottom left end point is included in the same mesh. For that reason, the area values S0' and S0''' are written to the same address of the same memory and so are the area values S2' and S2'''.

In the memories thus grouped, one signal address may have different values written thereto as shown in Table 1. This means that simply accessing one address in one memory does not provide a correct area value included in a mesh. The area value included in each mesh should thus be computed by reading area values from the same address in the four memories and by adding up the retrieved values. The calculations are performed on a pipeline basis by use of an adding circuit which is located downstream of the partial memories for the purpose of integrating four pieces of data.

[Second Embodiment]

With the first embodiment shown in Figs. 3 and 4, simplified address assignments make it relatively easy to build circuitry. However, because each address is assigned to four memories in replicated fashion, the embodiment

00345000.052400  
00T250.0005T00

requires four times as much storage space as that of the single memory setup. Increased memory requirements signify a growing number of circuit elements needed, which makes mounting of component parts on the substrate more difficult and incurs higher costs than before. The second embodiment, by contrast, provides an appreciable saving in the total amount of partial memories by dividing exposure map addresses into four portions each allocated to a partial memory.

With reference to Fig. 9 showing relations between meshes on the one hand and partial memories on the other hand, description will now be made in detail of the memories and their addresses for accommodating area values  $S_0$ ,  $S_1$ ,  $S_2$  and  $S_3$  of each shot divided between meshes. Four memories are used to retain different data. It is thus necessary to regard each address as representative of four meshes so that their data will not conflict.

Fig. 9 shows a partial region made of  $M_s \times N_s$  meshes in groups of four, with each mesh group assigned an address. Each encircled numeral corresponding to a group of four meshes represents a partial memory address. Of the four meshes given an identical address, the bottom left mesh is allocated to the partial memory 0, the bottom right mesh to the partial memory 1, the top left mesh to the partial memory 2, and the top right mesh to the partial memory 3. When area density data on each mesh are to be stored, a

00345000.052400  
00T250" 0065T300

normal mesh address is halved and the halved addresses are used as the addresses of partial memories (0 through 3). If a shot straddles a boundary where addresses change from one partial memory to another, the memories need to be switched so as to accommodate the area values, and the addresses also need to be changed.

If a partial memory address is assumed to be (M, N) and if the remainder involved is assumed to be (M LSB, N LSB), these values are defined by expression (2) as follows:

$$\begin{aligned} M &= \text{Floor}[m(i)/2], \quad M_{\text{LSB}} = \text{Mod}[m(i)/2] \\ N &= \text{Floor}[n(i)/2], \quad N_{\text{LSB}} = \text{Mod}[n(i)/2] \quad \dots (2) \end{aligned}$$

where, Floor[a/b] stands for the quotient (integer) of a/b and Mod[a/b] for the remainder (integer) of a/b.

In other words, a mesh address (m, n) is defined by expression (3) given below. The address may be expressed by data with the least significant bits given as (M LSB, N LSB) as shown in Fig. 10.

$$m(i) = 2 \times M + M_{\text{LSB}}, \quad n(i) = 2 \times N + N_{\text{LSB}} \quad \dots (3)$$

The numeral of each partial memory and its address are designated by use of the above parameters. A point of reference is assumed to be located in the mesh including the bottom left end point of a shot. Judgments are then formed about address (m, n) of the mesh in which the bottom left end point of the shot is found. In that case, there are provided four conditions in which to divide the area

0015988 052199  
667250" 88657E60

value of the shot in question and to store the divided values. The divided shot area values  $S_0$ ,  $S_1$ ,  $S_2$  and  $S_3$  are written to designated addresses in designated partial memories as will be shown below. The values  $S_0$ ,  $S_1$ ,  $S_2$  and  $S_3$  stand for the area values included in the meshes  $(m, n)$ ,  $(m, n+1)$ ,  $(m+1, n)$  and  $(m+1, n+1)$  respectively.

In the description that follows, a partial memory address is given as  $(M, N)$  under conditions (i) through (iv) for purpose of simplification and illustration. In practice, the address of a given partial memory is defined by expression (4) below.

$$(\text{Partial memory address}) = M \times (N_s/2) + N \quad \dots (4)$$

where  $M = 0, 1, 2, \dots, M_s/2$  and  $N = 0, 1, 2, \dots, N_s/2$ .

Condition (i): This is a case where the entire shot is included in a partial memory with address  $(M, N)$  such as is shown in Fig. 11, i.e., where the least significant bits of  $(m, n)$  are both zero, or  $\{M \text{ LSB} = 0\} \cap \{N \text{ LSB} = 0\}$ . In this case, the area values  $S_0$ ,  $S_1$ ,  $S_2$  and  $S_3$  are written to the partial memory addresses designated as shown in Table 2.

Table 2

		PARTIAL MEMORY	ADDRESS
AREA VALUE	$S_0$	PARTIAL MEMORY 0	$(M, N)$
	$S_1$	PARTIAL MEMORY 1	$(M, N)$
	$S_2$	PARTIAL MEMORY 2	$(M, N)$
	$S_3$	PARTIAL MEMORY 3	$(M, N)$



Condition (ii): This is a case where the shot straddles partial memories with addresses (M, N) and (M, N+1) such as is shown in Fig. 12, i.e., where the least significant bits of "m" and "n" are 0 and 1 respectively, or  $\{M \text{ LSB} = 0\} \cap \{N \text{ LSB} = 1\}$ . In this case, the area values S0, S1, S2 and S3 are written to the partial memory addresses designated as shown in Table 3.

Table 3

		PARTIAL MEMORY	ADDRESS
AREA VALUE	S0	PARTIAL MEMORY 1	(M, N)
	S1	PARTIAL MEMORY 0	(M, N+1)
	S2	PARTIAL MEMORY 3	(M, N)
	S3	PARTIAL MEMORY 2	(M, N+1)

Condition (iii): This is a case where the shot straddles partial memories with addresses (M, N) and (M+1, N) such as is shown in Fig. 13, i.e., where the least significant bits of "m" and "n" are 1 and 0 respectively, or  $\{M \text{ LSB} = 1\} \cap \{N \text{ LSB} = 0\}$ . In this case, the area values S0, S1, S2 and S3 are written to the partial memory addresses designated as shown in Table 4.

Table 4

		PARTIAL MEMORY	ADDRESS
AREA VALUE	S0	PARTIAL MEMORY 2	(M, N)
	S1	PARTIAL MEMORY 3	(M, N)
	S2	PARTIAL MEMORY 0	(M+1, N)
	S3	PARTIAL MEMORY 1	(M+1, N)

094598-052400  
001250-88657E60

Condition (iv): This is a case where the shot straddles all for partial memories such as is shown in Fig. 14, i.e., where the least significant bits of "m" and "n" are both 1, or  $\{M \text{ LSB} = 1\} \cap \{N \text{ LSB} = 1\}$ . In this case, the area values S0, S1, S2 and S3 are written to the partial memory addresses designated as shown in Table 5.

Table 5

		PARTIAL MEMORY	ADDRESS
AREA VALUE	S0	PARTIAL MEMORY 3	(M, N)
	S1	PARTIAL MEMORY 2	(M, N+1)
	S2	PARTIAL MEMORY 1	(M+1, N)
	S3	PARTIAL MEMORY 0	(M+1, N+1)

Table 6 below summarizes the partial memory assignments relative to the area values shown illustratively above.

Table 6

$M_{\text{LSB}}$	$N_{\text{LSB}}$	PARTIAL MEMORY 0	PARTIAL MEMORY 1	PARTIAL MEMORY 2	PARTIAL MEMORY 3
0	0	S0	S1	S2	S3
0	1	S1	S0	S3	S2
1	0	S2	S3	S0	S1
1	1	S3	S2	S1	S0

Fig. 15 schematically depicts how area values divided by mesh boundaries are typically allocated to partial memories. In Fig. 15, a simplified map of  $4 \times 4$

0355TF60  
66T250

meshes is shown containing shots 1 through 4. If the map is assumed to be divided into groups of  $2 \times 2$  meshes, then the partial memories are given four addresses ① through ④. In Fig. 15, each region enclosed by thin lines is a mesh, and each region enclosed by thick lines is covered by a partial memory address. If it is assumed that a shot "n" is divided by mesh boundaries into areas whose values are  $S_0(n)$ ,  $S_1(n)$ ,  $S_2(n)$  and  $S_3(n)$ , then these area values are written to addresses of partial memories as designated in Table 7 that follows. Illustratively, the area of the shot 4 is divided so that the divided area values are stored into the memories as shown below.

$S_0(4) \rightarrow$  written to address ① of partial memory 3  
 $S_1(4) \rightarrow$  written to address ② of partial memory 2  
 $S_2(4) \rightarrow$  written to address ③ of partial memory 1  
 $S_3(4) \rightarrow$  written to address ④ of partial memory 0

Table 7

		PARTIAL MEMORY 0	PARTIAL MEMORY 1	PARTIAL MEMORY 2	PARTIAL MEMORY 3
ADDRESS	1	$S_0(1)$	$S_1(1) + S_0(2)$	$S_2(1) + S_0(3)$	$S_3(1) + S_2(2) + S_1(3) + S_0(4)$
	2	$S_1(2)$	0	$S_3(2) + S_1(4)$	0
	3	$S_2(3)$	$S_3(3) + S_2(4)$	0	0
	4	$S_3(4)$	0	0	0

Fig. 8 is a block diagram of another proximity effect correcting unit of the invention. In Fig. 8, the components with their functionally identical or equivalent

counterparts included in Fig. 3 are designated by like reference numerals. In this proximity effect correcting unit, partial memories 44a through 44d are laid out in the same manner as in the circuit of Fig. 3 while a selector 41 is located downstream of area value computing units 33a through 33d which calculate area values for each mesh. The selector 41 judges through address calculations which of the four meshes (bottom left, bottom right, top left, top right) enclosed by thick lines in Fig. 9 corresponds to the position of the mesh whose area value has been computed. In so doing, the selector 41 selects one of partial memories 0 through 3 in which to store the calculated area value.

The address of the selected partial memory is sent from an address computing unit 38. The area value is then written to four partial memories 44a through 44d in accordance with the assignments shown in Tables 2 through 5. At the same time, the data at the same address in the partial memories 44a through 44d are retrieved therefrom and added to the data existing at the same address before the write operation.

In practice, to retrieve the existing data requires selecting the partial memories 44a through 44d. The requirement is met by a selector 42 located downstream of the partial memories 44a through 44d. Alternatively, the selector 42 is not needed if a downstream exposure map 36

00345988 052109  
00000000 00000000

is constituted by four memories. In such a case, the partial memory numbers (i.e., partial memories 0 through 3) need only be assigned to the four exposure map memories.

More specifically, the selector 42 may be omitted where the partial memory 0 is allocated to the exposure map memory 0, the partial memory 1 to the exposure map memory 1, partial memory 2 to the exposure map memory 2, and the partial memory 3 to the exposure map memory 3. This arrangement affords an appreciable memory saving. With the area of the memory layout thus reduced, the area for mounting component parts is diminished correspondingly.

Although the examples above have been shown utilizing partial memories, this is not limitative of the invention. Alternatively, area values or area density data may be written directly to the exposure map, i.e., without memory intervention.

As described and according to the invention, highly precise exposure maps are created regardless of the shot size. With no need to minimize the shot size, the time required to create exposure maps is shortened substantially.

As many apparently different embodiments of this invention may be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

0345988 052193  
66 FEB 50 8865 FEB 60

WHAT IS CLAIMED IS:

1. An electron beam lithography system comprising:  
exposure map creating means which, based on  
positional relations between meshes dividing a region to be  
rendered by an electron beam on the one hand and shots to  
be rendered by said electron beam on the other hand,  
creates an exposure map by calculating an area density from  
a shot area included in each of said meshes; and

proximity effect correcting means for correcting a  
level of exposure for each of said shots by referencing  
said exposure map so that each shot is exposed at the  
corrected level;

wherein said exposure map creating means includes  
judging means for judging whether or not each shot  
straddles a plurality of meshes.

2. An electron beam lithography system according to  
claim 1, wherein, based on positional relations between  
coordinates of two diagonally positioned edge points of  
each shot on the one hand and mesh boundaries on the other  
hand, said judging means judges whether the shot in  
question straddles said plurality of meshes.

3. An electron beam lithography system according to  
claim 1, wherein said exposure map creating means divides  
each shot straddling said plurality of meshes by boundaries  
of said meshes so that either area values or area densities

005980 05290

of divided shots included in each mesh are added to the mesh in question.

4. An electron beam lithography system according to claim 3, further comprising  $N \times M$  memories for accommodating either area values or area densities of shots,  $N$  representing a maximum number of divided shots in a direction of one boundary of a given mesh,  $M$  denoting a maximum number of divided shots in a direction of another boundary of the mesh in question.

5. An electron beam lithography system according to claim 4, wherein, when either an area value or an area density of each shot is divided for a plurality of meshes in order to store the divided values or densities into said memories, either the divided shot area values or the divided shot area densities included in each mesh are set simultaneously to different addresses in different memories so that when data are to be retrieved from said memories, said data are read from the same address of all memories.

6. An electron beam lithography system according to claim 5, further comprising a function for adding up a plurality of data retrieved from the same address in a plurality of said memories.

7. An electron beam lithography system according to claim 4, further comprising  $N \times M$  memories assigned the same addresses as those of  $N \times M$  meshes constituting each of mesh groups dividing said region to be rendered by said

09345988 052199  
66T250 8865T660

electron beam.

8. An electron beam lithography system according to claim 7, further comprising selecting means for selecting a desired memory as well as a desired address therein from among said  $N \times M$  memories in accordance with the address of a given mesh.

9. An electron beam lithography system according to claim 8, wherein said selecting means selects the memory into which to store either the area value or the area density of the mesh in question at an address (m, n) on the basis of a remainder from a formula of  $n/N$  and a remainder from a formula of  $m/M$ , said selecting means further selecting said address based on a quotient of said formula of  $n/N$  and on a quotient of said formula of  $m/M$ .

10. An electron beam lithography system comprising:  
exposure map creating means which, based on positional relations between meshes dividing a region to be rendered by an electron beam on the one hand and shots to be rendered by said electron beam on the other hand, creates an exposure map by calculating an area density from a shot area included in each of said meshes; and

proximity effect correcting means for correcting a level of exposure for each of said shots by referencing said exposure map so that each shot is exposed at the corrected level;

wherein said exposure map creating means includes

0015988 05169  
66T250 8865T660



judging means for judging whether or not each shot straddles a plurality of meshes; and

wherein said exposure map is made of  $N \times M$  memories for accommodating either area values or area densities of shots,  $N$  representing a maximum number of divided shots in a direction of one boundary of a given mesh,  $M$  denoting a maximum number of divided shots in a direction of another boundary of the mesh in question.




00315988 052199  
06T250 8865T60

ABSTRACT OF THE DISCLOSURE

An object of this invention is to provide an electron beam lithography system capable of rapidly creating an accurate exposure map for proximity effect correction. The inventive system creates the map by dividing shot figures by mesh and adding up the divided area values for each mesh. The system comprises: (1) a function for judging and dividing boundaries of shots to be rendered based on mesh positions as well as shot positions and figures in the map, and (2) a function for calculating divided shot area values and adding the values simultaneously to adjacent addresses in cumulative fashion in a plurality of memories furnished downstream of the system.

00345988-052499  
66T250-8865T60

**FIG.1**

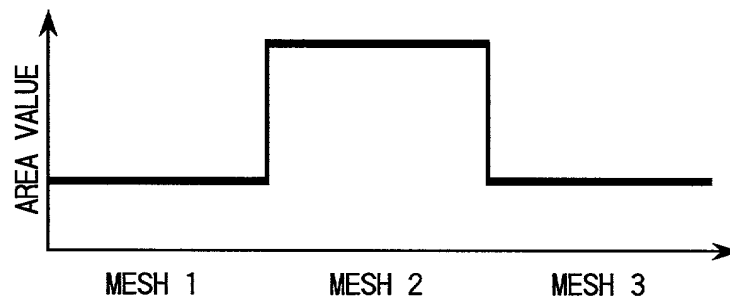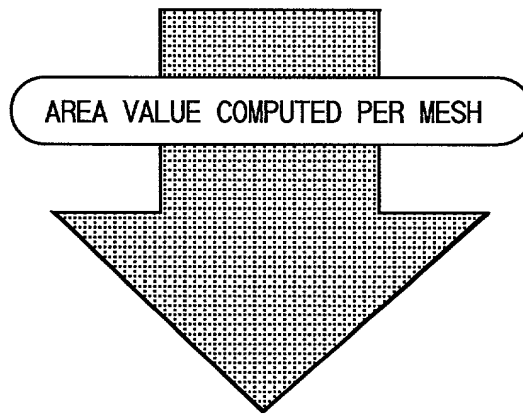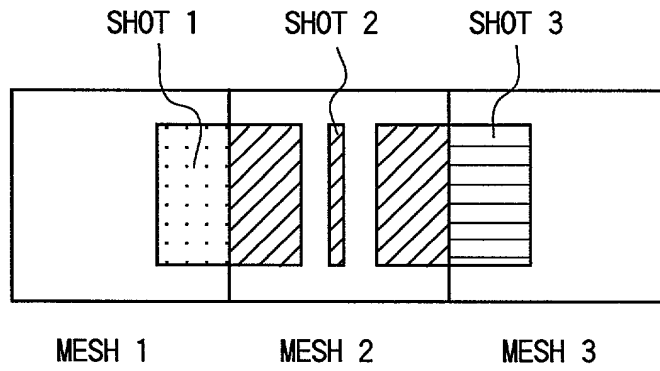

66T250" 8865T60

FIG.2

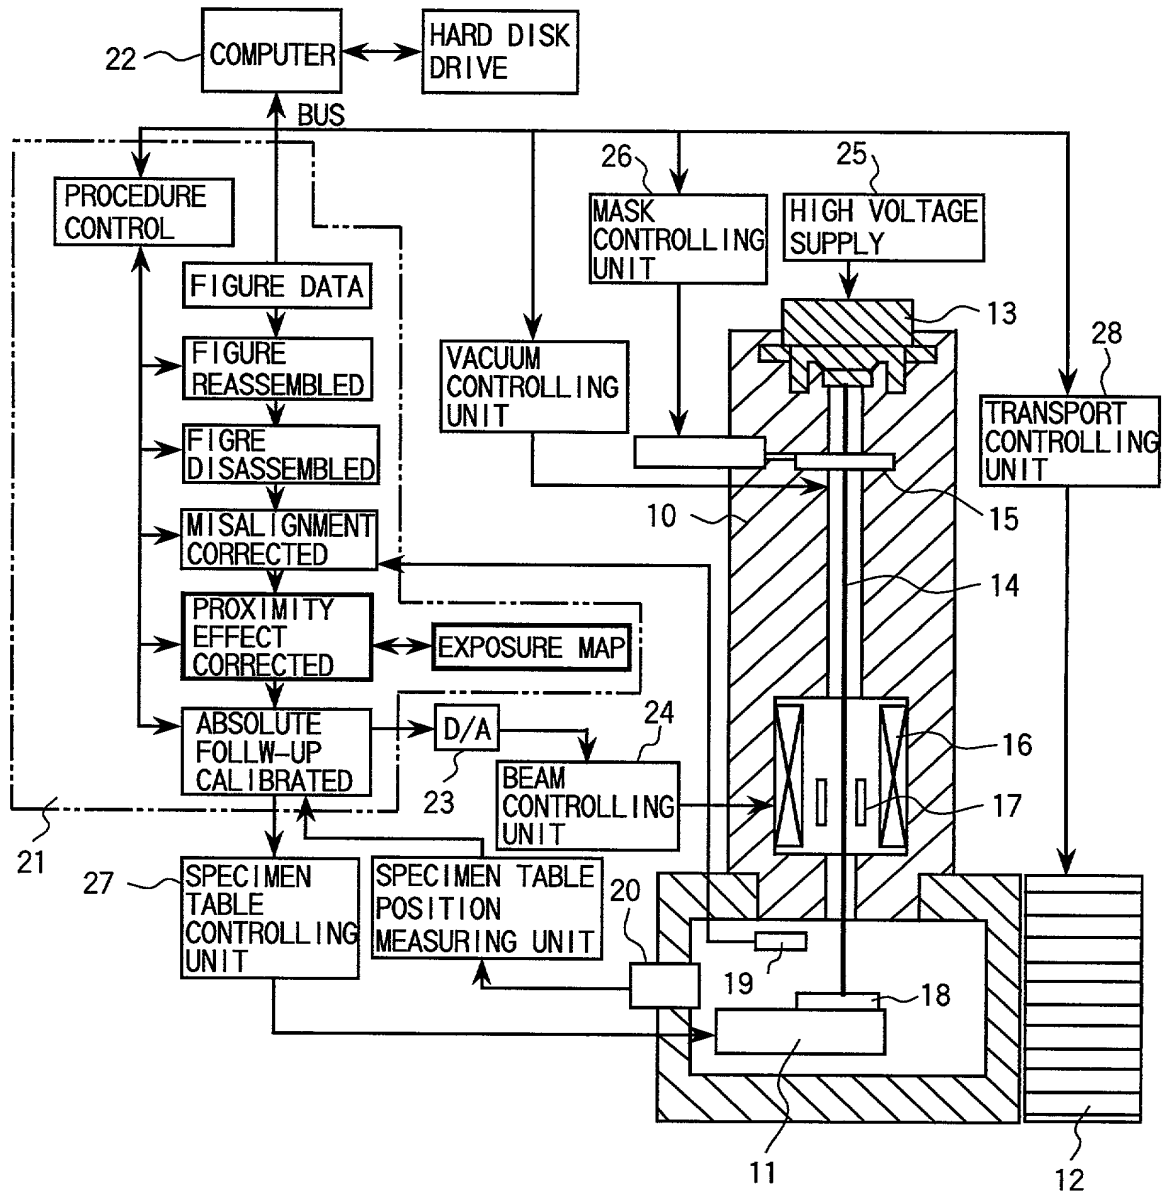


FIG.3

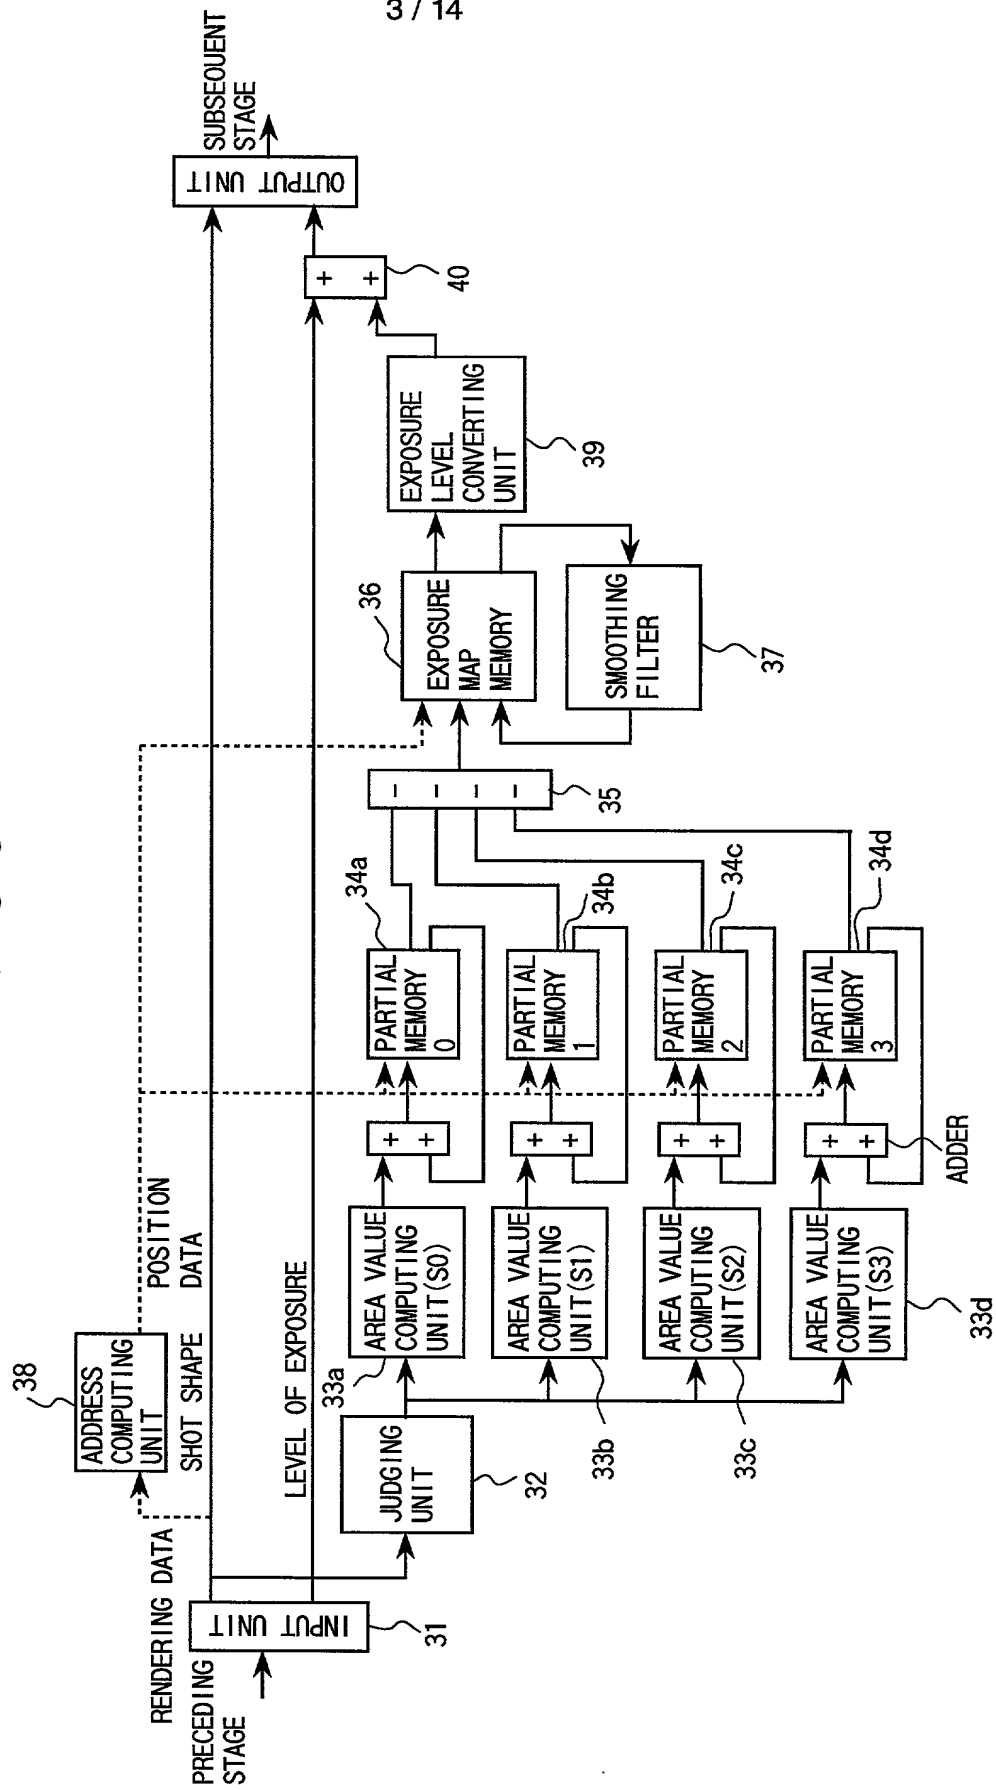


FIG.4

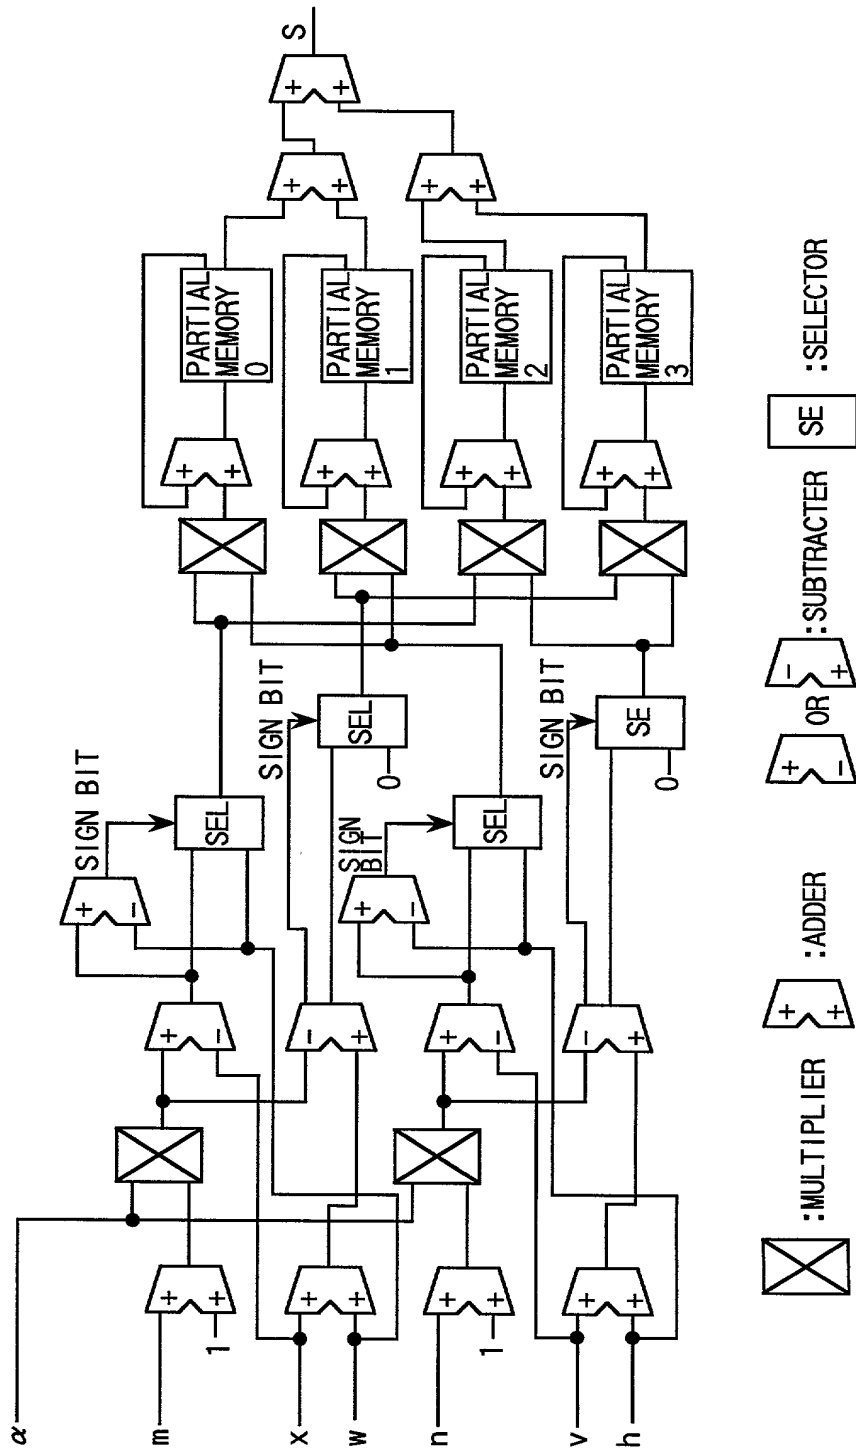


FIG.5

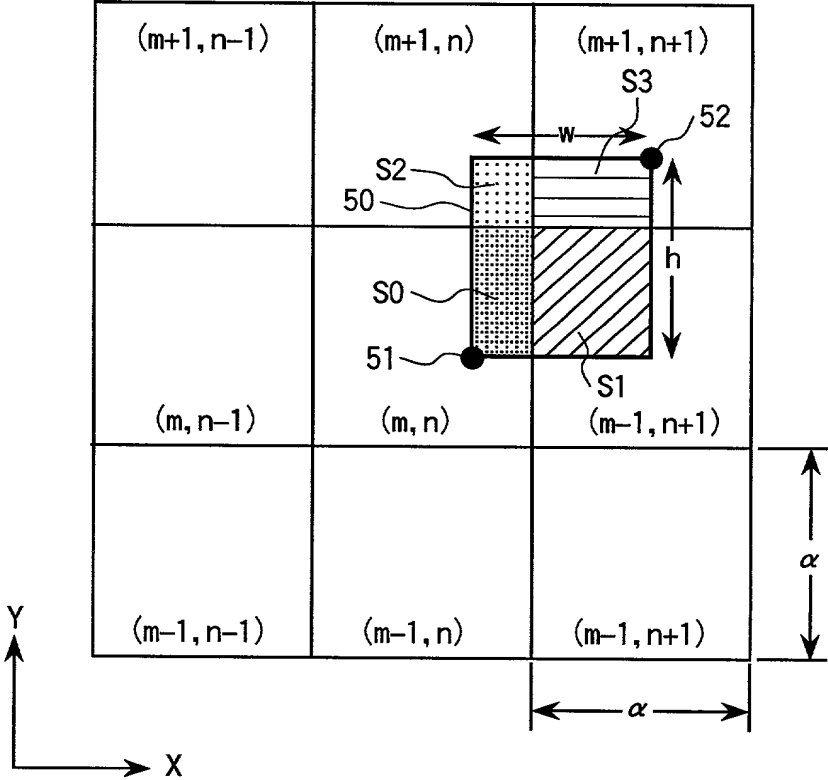


FIG.6

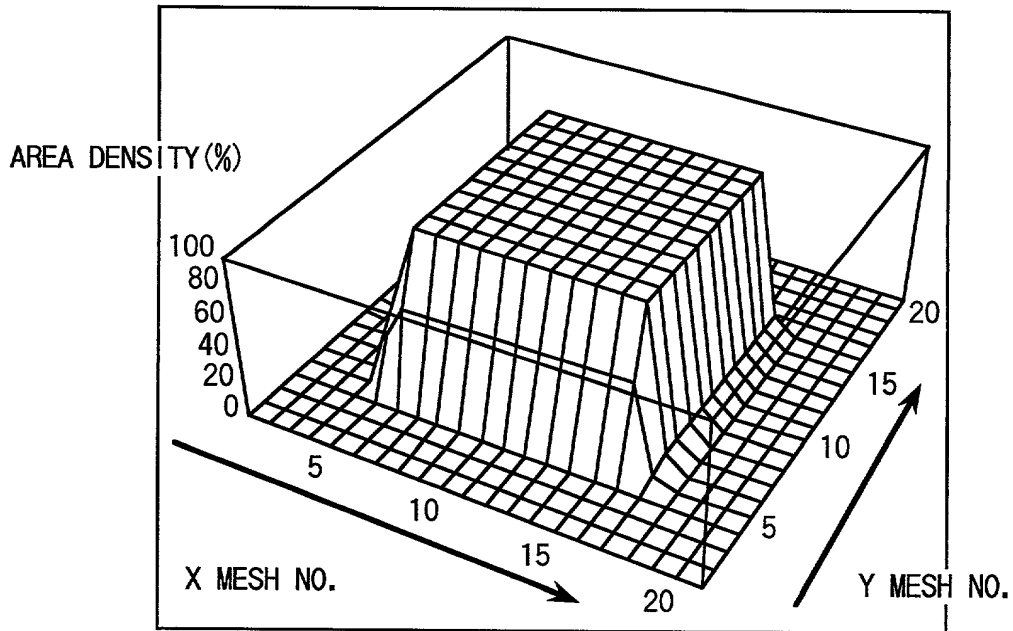


FIG.7

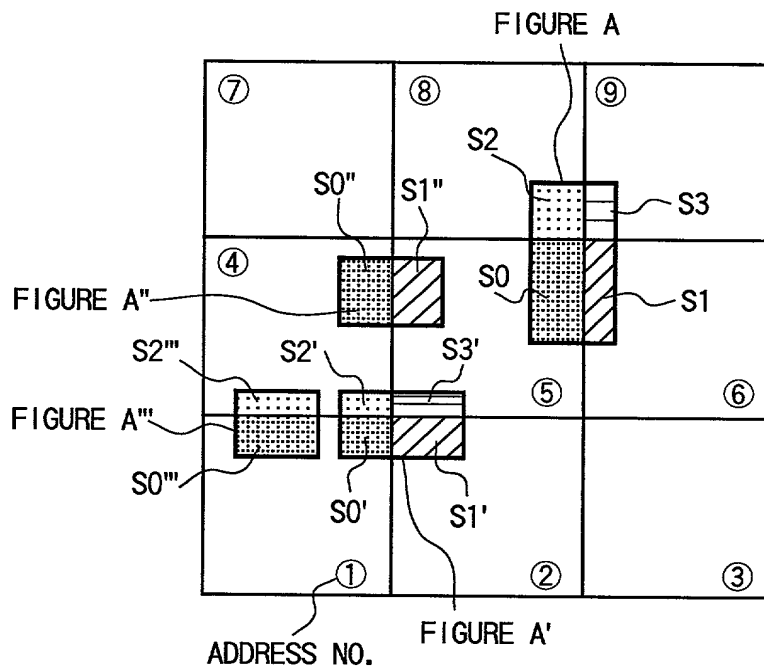




FIG.8

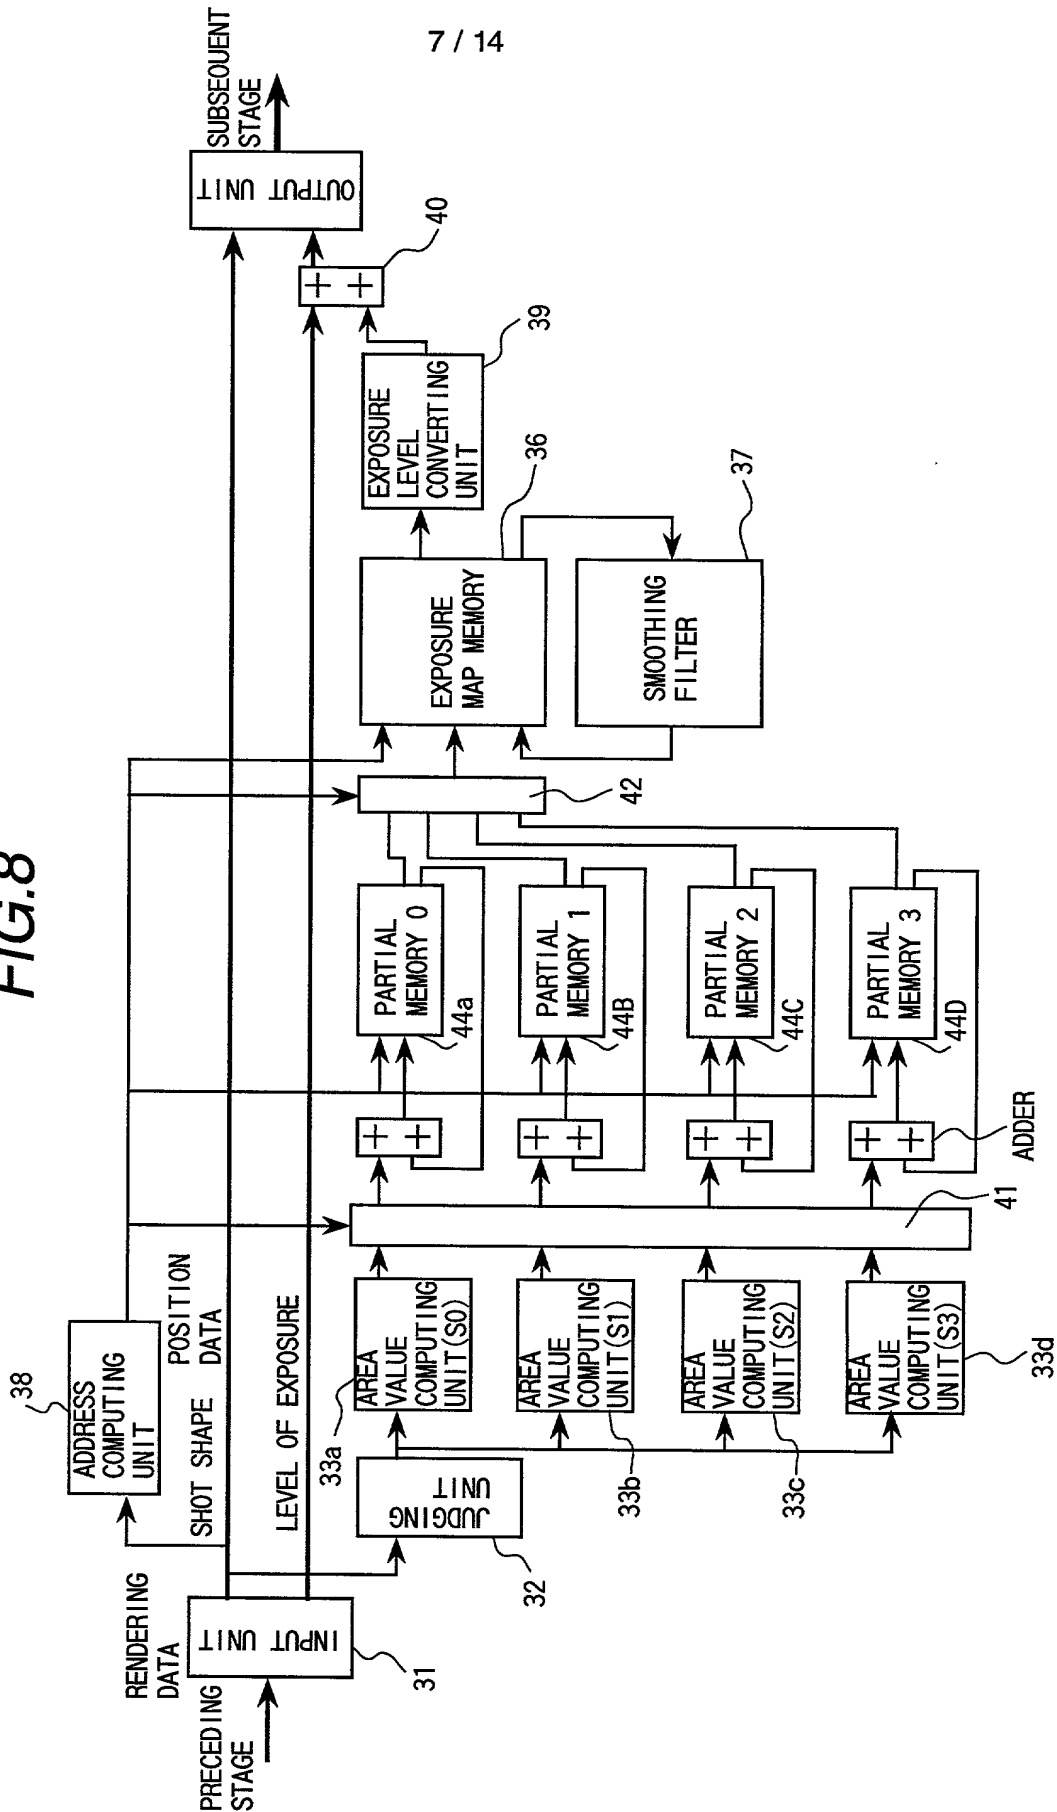


FIG.9



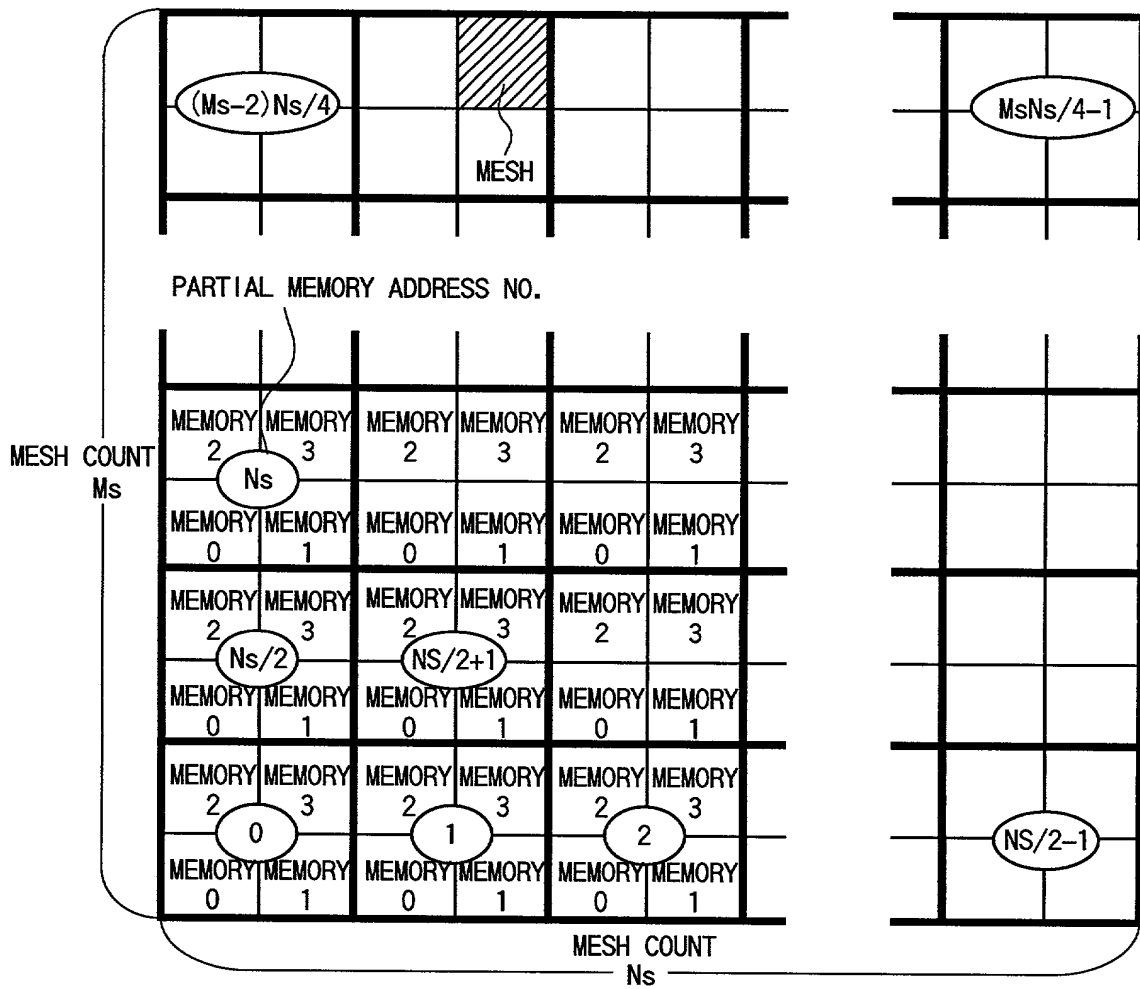



FIG.10

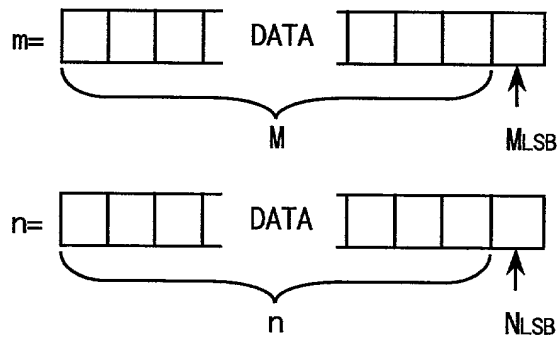

**FIG.11**

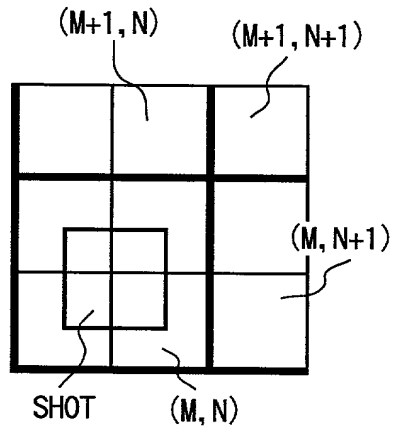

**FIG.12**

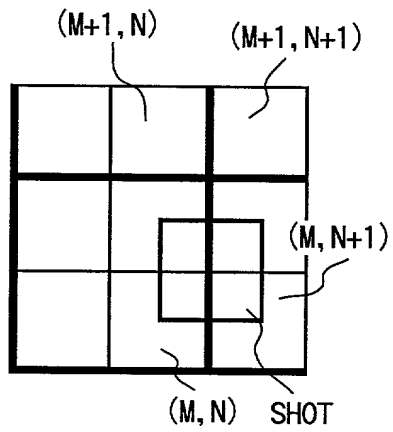

**FIG.13**

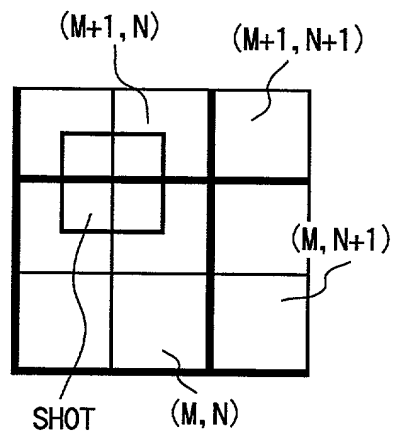


FIG. 14

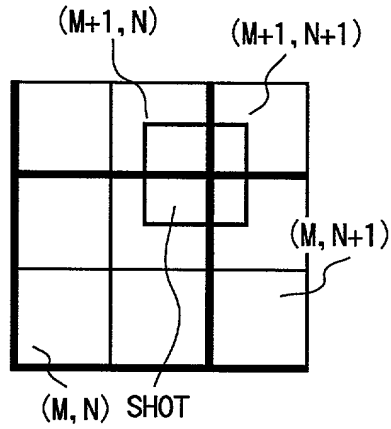


FIG. 15

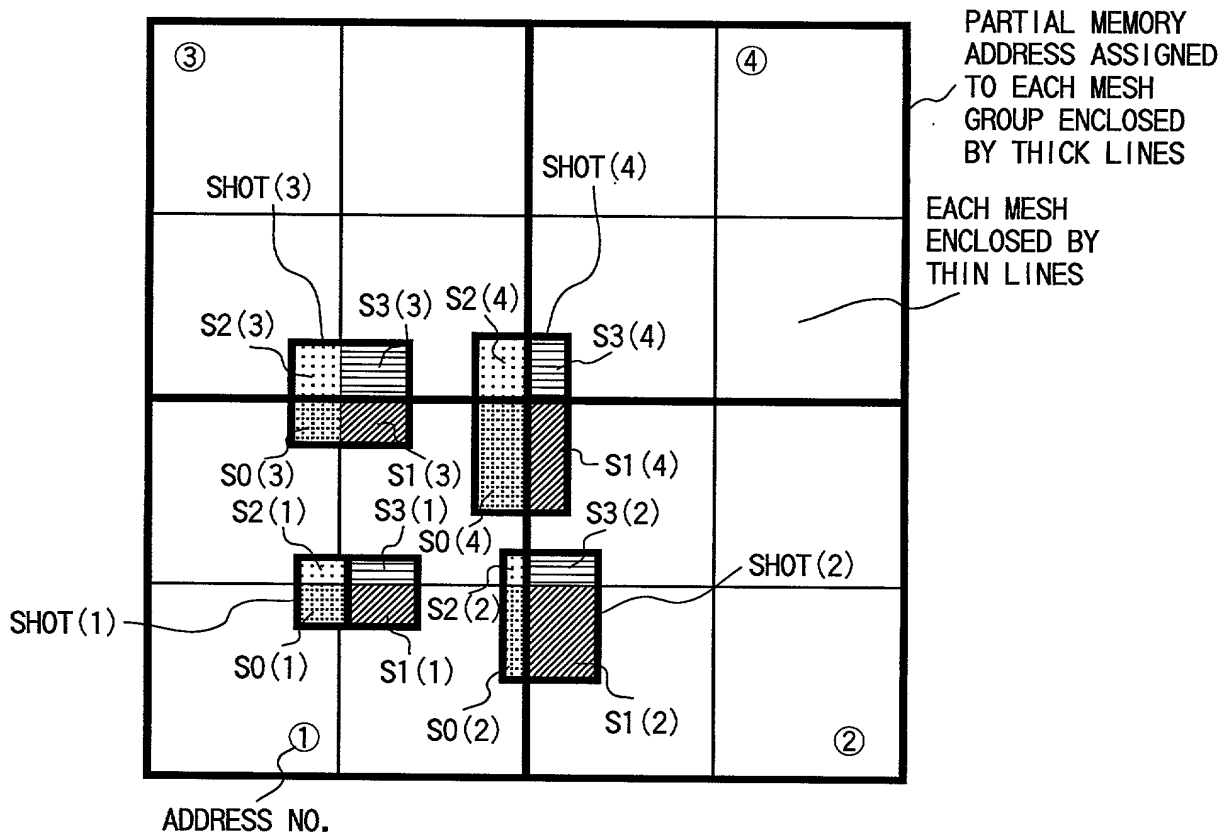


FIG. 16

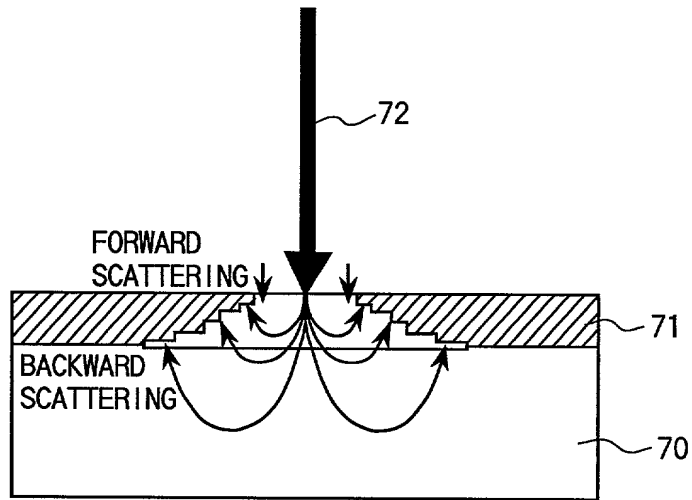


FIG. 18





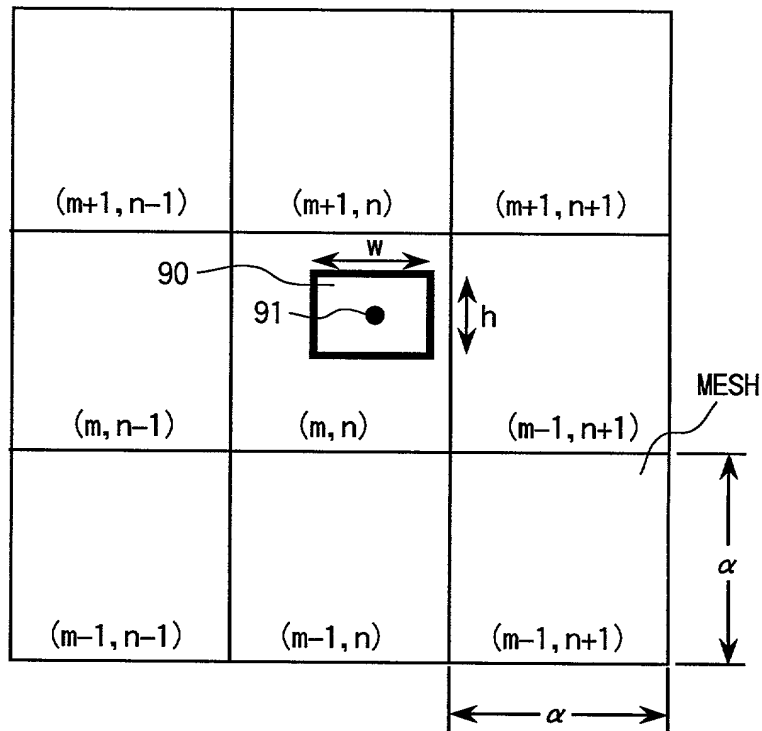


FIG.17

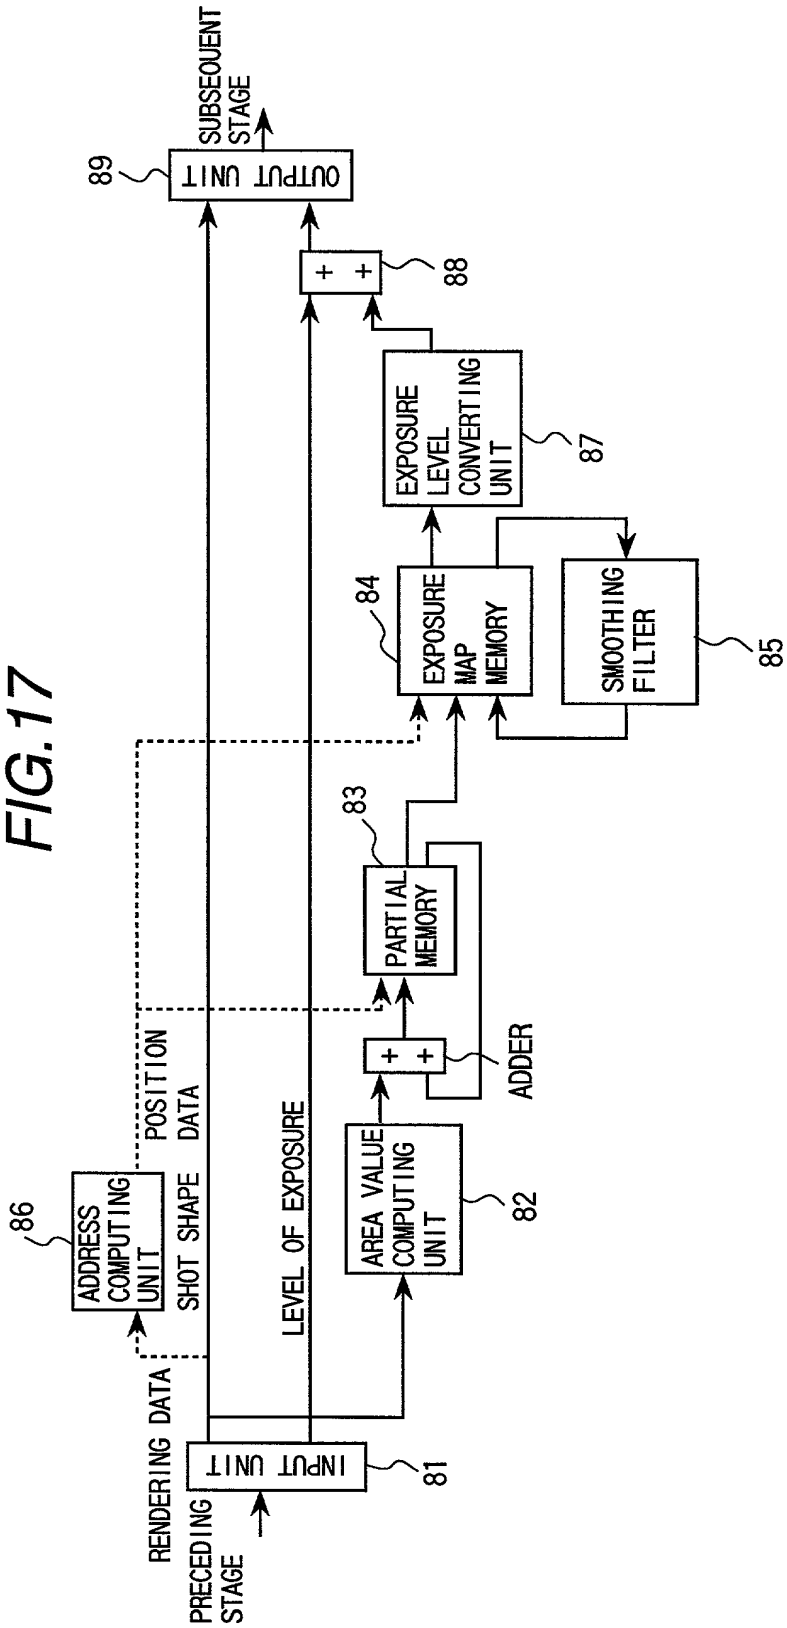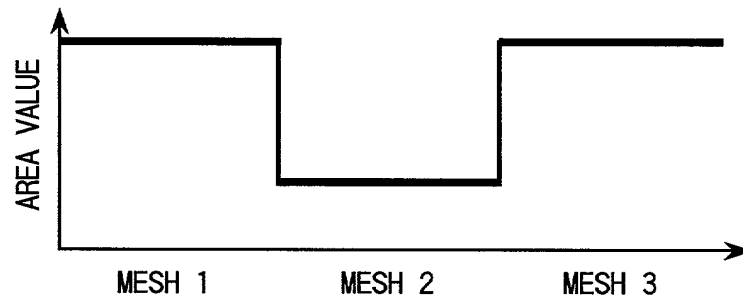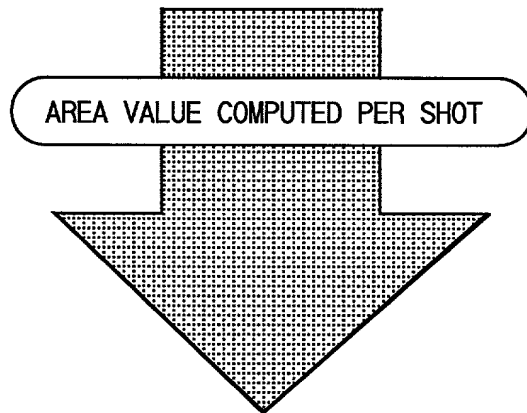

**FIG.19**

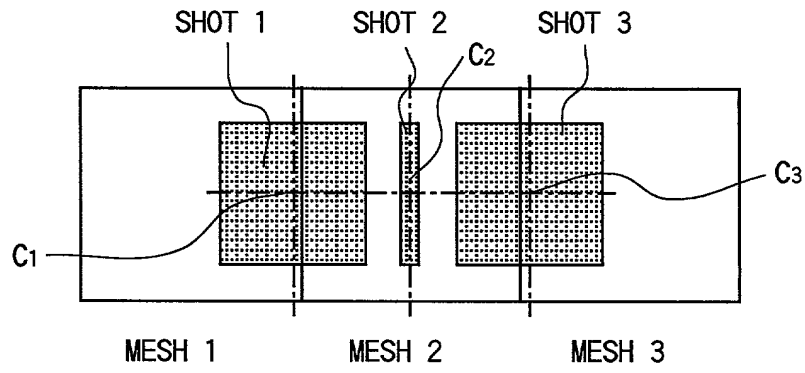

66T250" 8865T E60

FIG.20


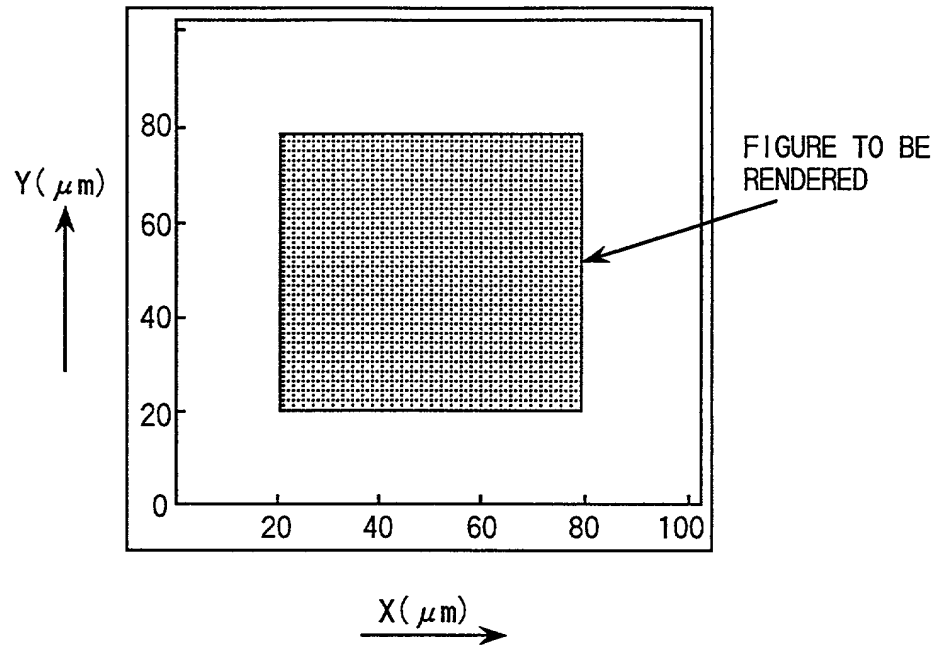


FIG.21



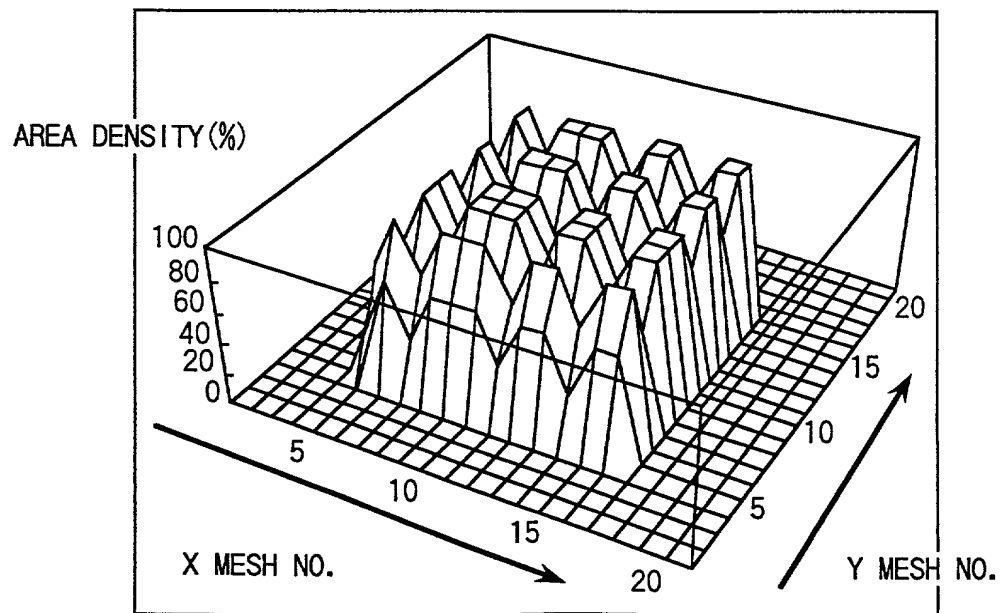

## DECLARATION AND POWER OF ATTORNEY - ORIGINAL APPLICATION

ATTORNEY'S DOCKET NO.

29273/502

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled ELECTRON BEAM

LITHOGRAPHY SYSTEM

the specification of which

(check one)

XX is attached hereto.

\_\_\_\_\_ was filed on \_\_\_\_\_ as Application Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
Japan	10-149045	May 29, 1998		<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
				<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NO.	FILING DATE (day, month, year)	STATUS (i.e. Patented, Pending, Abandoned)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Edward W. Greason  
Reg. No. 18,918

SEND CORRESPONDENCE TO:

Edward W. Greason  
Kenyon & Kenyon  
One Broadway  
New York, N.Y. 10004

DIRECT TELEPHONE CALLS TO:  
(name and telephone number)

John C. Altmiller  
(202) 220-4200

(continued)

66250-88657E60

201	FULL NAME OF INVENTOR	FAMILY NAME Kawano	FIRST GIVEN NAME Hajime	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Hitachinaka-shi	STATE OR FOREIGN COUNTRY Ibaraki	COUNTRY OF CITIZENSHIP Japan
	POST OFFICE ADDRESS	POST OFFICE ADDRESS Room 6-108, tsukubadai Apt., 663, Ichige, Hitachinaka-shi, Ibaraki 312-0033, Japan		
202	FULL NAME OF INVENTOR	FAMILY NAME Wakita	FIRST GIVEN NAME Minoru	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Hitachinaka-shi	STATE OR FOREIGN COUNTRY Ibaraki	COUNTRY OF CITIZENSHIP Japan
	POST OFFICE ADDRESS	POST OFFICE ADDRESS Hitachi Wing, 11-1, Aoba-cho, Hitachinaka-shi, Ibaraki 312-0056, Japan		
203	FULL NAME OF INVENTOR	FAMILY NAME Kamada	FIRST GIVEN NAME Masato	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Hitachinaka-shi	STATE OR FOREIGN COUNTRY Ibaraki	COUNTRY OF CITIZENSHIP Japan
	POST OFFICE ADDRESS	POST OFFICE ADDRESS Room B203, Amezawa Hattsu, 687-8, Horiguchi, Hitachinaka-shi, Ibaraki 312-0034, Japan		
204	FULL NAME OF INVENTOR	FAMILY NAME Yoda	FIRST GIVEN NAME Haruo	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Nishitama-gun	STATE OR FOREIGN COUNTRY Tokyo	COUNTRY OF CITIZENSHIP Japan
	POST OFFICE ADDRESS	POST OFFICE ADDRESS 2196-79, Hirai, Hinode-machi, Nishitama-gun, Tokyo 190-0182, Japan		
205	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
206	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE OR FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	POST OFFICE ADDRESS	CITY	STATE & ZIP CODE/COUNTRY
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.</p>				
SIGNATURE OF INVENTOR 201 <i>Hajime Kawano</i>		SIGNATURE OF INVENTOR 202 <i>Minoru Wakita</i>		SIGNATURE OF INVENTOR 203 <i>Masato Kamada</i>
DATE <i>04/05/99</i>		DATE <i>04/05/99</i>		DATE <i>04/05/99</i>
SIGNATURE OF INVENTOR 204 <i>Haruo Yoda</i>		SIGNATURE OF INVENTOR 205		SIGNATURE OF INVENTOR 206
DATE <i>04/05/99</i>		DATE		DATE